



وزارة التعليم العالي والبحث العلمي
جامعة ميسان
كلية التربية الاساسية

Ministry of Higher Education and Scientific
Research
University of Misan
College of Basic Education

Misan Journal for Academic Studies
Humanities, social and applied sciences

مجلة ميسان
للدراسات الأكاديمية
العلوم الانسانية والاجتماعية والتطبيقية

ISSN (Print) 1994-697X
(Online)-2706-722X

المجلد 24 العدد 53 اذار 2025

Mar 2025 Issue53 VOL24



مجلة ميسان للدراسات الاكاديمية

العلوم الإنسانية والاجتماعية والتطبيقية

كلية التربية الأساسية / جامعة ميسان / العراق

Misan Journal for Academic Studies

Humanities, social and applied sciences

College of Basic Education/University of Misan/Inq

ISSN (Print) 1994-697X (Online) 2706-722X

2025 اذار العدد 53 المجلد 24
2025 Mar Issue53 VOL24



OJS / PKP
www.misan-jas.com

IRAQI
Academic Scientific Journals



ORCID

OPEN ACCESS



journal.m.academy@uomisan.edu.iq

رقم الابداع في دار الكتب والوثائق بغداد 1326 في 2009

الصفحة	فهرس البحوث	ت
14 - 1	Evaluation of anti-plaque and anti-inflammatory efficacies of mouth rinse containing green tea and <i>Salvadora Persica L.</i> in the management of dental biofilm-induced gingivitis Aliaa Saeed Salman Maha Abdul Azeez Ahmed	1
26 - 15	Evaluation of galectin-3 and peptidyl arginine deiminase-4 levels in saliva for periodontal health, gingivitis and periodontitis Yusur Ali Abdulrazzaq Alaa Omran Ali	2
37 - 27	EFFECT OF HYPOCHLOROUS ACID ON SURFACE ROUGHNESS AND WETTABILITY OF ZINC OXIDE EUOGENOL IMPRESSION PASTE Israa J.Taha Shorouq M. Abass	3
47 - 38	Annual groundwater recharge estimation in Nineveh plain, northern Iraq using Chloride Mass Balance (CMB) method Fatima AJ. Abdul Wahab Alaa M. Al-Abadi	4
61 - 48	A Theoretical Study for Excitation of Electrons Collides with Positive Nitrogen Ions Hawraa S. Kadhim Alaa A. Khalaf	5
72 - 62	Green synthesis of gold nanoparticles (AuNPs) using pathogenic bacteria <i>Acinetobacter baumannii</i> with evulation their antibacterial activity Hawraa Khalaf Abbood Rashid Rahim Hateet	6
82 - 73	Structural, Optical and Gas Sensor Properties of Zinc Oxide Nanostructured thin films prepared by Chemical Spray Pyrolysis Ameer I. Khudadad Ezzulddin Abdoulsahib Eeese	7
91 - 83	Soft denture liner and its additives (A review of literature) Ibrahim Ali Al-Najati Ghasak Husham Jani	8
103 - 92	A Critical Discourse Analysis of the Language of Persuasion in Political Discourse Mohammed Hussein Hlail	9
116 - 104	A Comprehensive Review of Rice Husk Derived Silica As Nano Filler (A review of literature) Azza Walaaldeen Khairi Huda jaafar naser	10
125 - 117	Evaluation of Superoxide Dismutase and their association with Diabetic neruopathy and Heart disease in Iraq populations Zainab A. Salman	11
139 - 126	Schema Theory in Sarah Moss's "The Fell": A Cognitive Stylistic Study Salah R. Al-Saed Nazar Abdul Hafidh Abeid	12
149 - 140	Validation and Development of UV spectroscopy method for the Estimation of Diclofenac sodium in Bulk and dos protected mode interface Mohammed R . Abdul - Azeez	13
167 - 150	Using A Genetic Algorithm to Solve the Inventory Model with A Practical Application Ahmed Jamal Mohammed Al-Botani Faris Mahdi Alwan Al-Rubaie	14
180 - 168	Seasonal Variatins of Polychlorinted Biphenyls compounds in Water of Tigris River , Maysan Province / Iraq Halima Bahar Kazem and Salih Hassan Jazza	15


200 - 181	The Reasons Behind the Societal Reversal on the Governance of Amir al-Mumineen After the Prophet's Death (Peace (PBUH)) Through the Sermons of Lady Fatima al-Zahra (Peace Be Upon Her) Fatima Abd Saeed Al-Maliki	16
217 - 201	The place and its Implications in Adghat Madinah novel " Saja Jasim Mohammed Assistant Instuctor	17
233 - 218	The Level of Strategic Thinking Among School Principals in the Center of Misan Governorate from the Perspective of Their Teachers Multaka Nasser Jabbar	18
253 - 234	The reality of the practice of Arabic language teachers in the primary stage of reciprocal teaching from the perspective of the specialty supervisors Khadija Najm Abdel Qader Ramla Jabbar Kazem	19
274 - 254	Optimal storage model to sustain the operation of Baghdad stations Establish an Faris Mahdi Alwan Ahmed Ali Mohammed	20
284 - 275	Poetry on the tongue of the other, a media vision. The poetry of Abu Marwan al-Jaziri (396 AH) is an example Sabreen Khalaf Hussein	21
297 - 285	Saudi-Japanese relations1938-1973(historical study Ali Joudah Sabih Al-Maliki Faraged Dawood Salman Al-Shallal	22
313 - 298	Influences on Al-Asma'i's Critical Judgment (A Critical Study) Hussam Kadhim Atiyah	23
334 - 314	The Effect of Felder and Silverman's Model in the Achievement of Fifth High School Female Students and Their Lateral Thinking in Mathematics. Shaymaa Kareem Hassoon	24
344 - 335	Enzymatic Activity of Fungi Isolated From the Bases of Stems and Roots of Faba Bean Plants Infected with Root Rot Disease Asia N Kadim Ali A Kasim Ghassan Mahdi Dagher	25
364 - 345	Alternative Means for Resolving Disputes Arising from Trading in the Securities Market (A Comparative study) Saja Majed Daowd	26



ISSN (Print) 1994-697X
ISSN (Online) 2706-722X

DOI:
<https://doi.org/10.54633/2333-024-053-004>

Received:13/11/2025
Accepted:5/12/2025
Published online:31/3/2025



Annual groundwater recharge estimation in Nineveh plain, northern Iraq using Chloride Mass Balance (CMB) method

Fatima AJ. Abdul Wahab^{1*}, Alaa M. Al-Abadi¹

¹ Department of Geology, College of Science, University of Basrah, Basrah, Iraq

² Department of Geology, College of Science, University of Mosul, Mosul 41001, Iraq

¹Fatima AJ Abdul Wahab: pgs.fatema.abduljabar@uobasrah.edu.iq .
<https://orcid.org/0009-0002-3068-3861>

Abstract:

This study evaluates groundwater recharge in the Nineveh Plain, northern Iraq, using the Chloride Mass Balance (CMB) method. The CMB method estimates recharge based on the conservation of chloride mass, relying on the comparison of chloride concentrations in precipitation and groundwater. Recharge rates calculated using this method ranged from 0.22 to 2.54 cm/year, with higher values observed in the northern regions due to greater precipitation and favourable infiltration conditions. Validation of the CMB-derived recharge map against hydrological parameters, such as the Curve Number (CN), yielded a strong correlation coefficient of 0.71, affirming the reliability of this method for estimating recharge.

Keywords: CN, Groundwater recharge, Chloride mass balance, Nineveh plain, Iraq

1. Introduction:

The Nineveh Plain in northern Iraq is of significant economic and historical value, known for its fertile soil and abundant archaeological sites, such as the ancient city of Nineveh (MacGinnis & Matney, 2009). The local economy is primarily based on agriculture, which relies extensively on groundwater for irrigation. This dependence has precipitated severe challenges, notably the depletion of groundwater, endangering the sustainability of agriculture, economic security, and the ecological balance (Al-Abadi, Al-Mohammadawi, et al., 2024; Al-Abadi, Hassan, et al., 2024; Al-Mohammadawi et al., 2022; Voss et al., 2013). The excessive withdrawal of groundwater has led to problems like land subsidence, environmental damage, and heightened susceptibility to climate change (Foster & Chilton, 2003; Konikow & Kendy, 2005).

Groundwater recharge, the process of replenishing aquifers through surface water infiltration, is vital for ensuring water availability and addressing these challenges (Mehner, 2009). Recharge supports agricultural, urban, and industrial activities, enhances water quality, and maintains ecological systems. Despite its importance, accurately

quantifying recharge in the Nineveh Plain remains difficult due to limited hydrological data, diverse subsurface conditions, and variations in climate and land use patterns.

To address these complexities, various methods are used to estimate recharge, including the water balance method, tracer studies, and soil moisture monitoring, often enhanced by GIS and remote sensing technologies. This study employs the chloride mass balance (CMB) technique to estimate groundwater recharge, overcoming data limitations and providing critical insights for sustainable water resource management. Accurate recharge estimation is key to safeguarding the region's economic and environmental sustainability.

2. Material and Methods:

2.1 The study area:

The Nineveh Plain is located in northern Iraq, within the latitudinal range of $36^{\circ}47'27.47''N$ to $35^{\circ}59'3.57''N$ and the longitudinal range of $42^{\circ}44'33.51''E$ to $43^{\circ}33'33.91''E$. The study area spans approximately 2547 km² in the eastern part of Mosul Governorate. It is bounded by Lake Mosul to the north, the Great Zab River to the south, and the Tigris River along its western edge, as shown in Fig. (1). The region experiences a climate transitioning from semi-arid to Mediterranean, characterized by hot, dry summers with temperatures exceeding 40°C and mild winters ranging from 5°C to 15°C. Most of the rainfall occurs during the winter months (November to March), with an annual average of 400–600 mm, which is vital for agriculture. However, the arid summers pose significant challenges for water resource management.

The terrain elevation ranges between 182 and 1049 m, averaging 328.64 ± 104.26 m, Fig. (1). The area's central and southern regions are comparatively flat, whereas the northern and northeastern parts are characterized by hills and valleys.

The Nineveh Plain soils are categorized into three hydrological soil groups (HSGs): B Soils with moderate infiltration rates. Typically consist of sandy loam soils, allowing moderate water infiltration, C soil with low infiltration rates. Often contain higher clay content or partially impervious layers, reducing water infiltration and increasing surface runoff, D Soils with very low infiltration rates or almost no infiltration. Include heavy clay soils or soils with shallow rock layers, severely limiting water infiltration and causing high surface runoff. The study area is primarily dominated by HSGs C and D, covering 36% (919 km²) and 54% (1383 km²), respectively. Group B covers only 9% (244 km²). This suggests that low recharge and high runoff generation are the dominant hydrological processes in the region.

The hydrogeological framework of the region is characterized by a dominance of sedimentary rocks, including limestone, sandstone, and alluvial deposits. Groundwater resources are primarily contained within Quaternary and Tertiary formations, notably the Mukdadiya, Bai Hassan, and Injana formations. The absence of a regional confining layer, coupled with the presence of faults and fractures, gives rise to a hydraulically interconnected, unconfined aquifer system. Groundwater depths exhibit spatial variability, ranging from 11 to 66 m, with an average depth of 116.47 ± 19.44 m. A general trend of decreasing depth from west to east is observed.

Transmissivity and specific yield, critical parameters for aquifer characterization, were assessed through pumping tests at 12 boreholes (Al-Ozeer et al., 2021). The transmissivity values displayed

considerable variability, ranging from 4.7 to 524.5 m²/d, with an average of 113.71 ± 161.31 m²/d. In comparison, the specific yield values were more consistent, spanning from 0.001 to 0.009 v/v , and averaging 0.005 ± 0.0027.

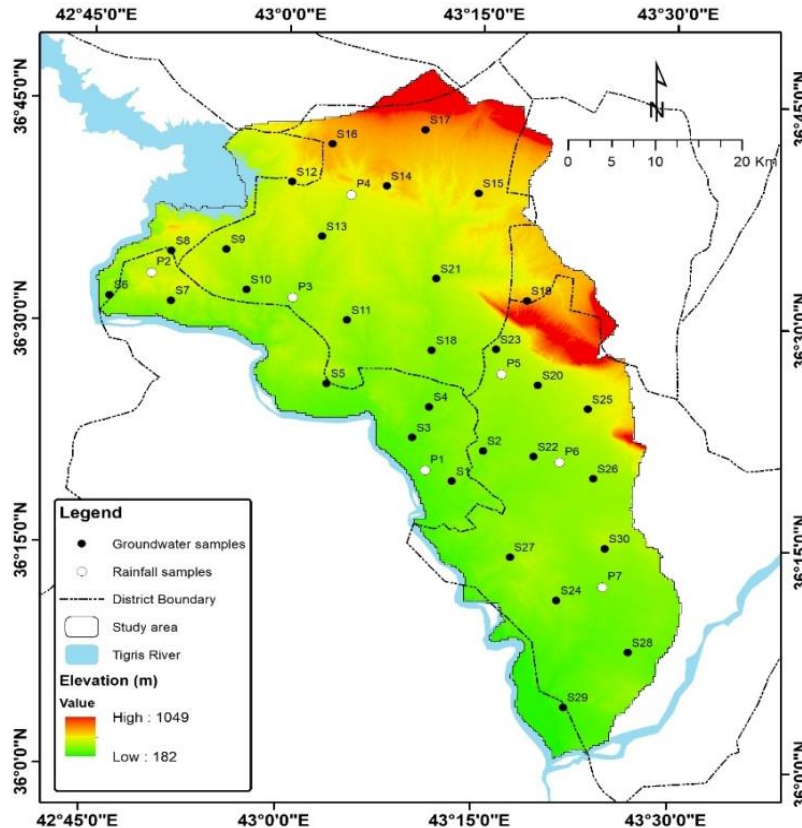


Fig. 1 Location of the study area with elevation in m.

2. 1Data Sate:

Water samples were collected from available wells and analysed, along with previously collected data, to map the spatial distribution of chloride ions. This map, combined with chloride concentrations in rainwater samples, enabled the calculation of the annual groundwater recharge rate. Water samples were analysed at Nahran Omar laboratories, Basra Oil Company. A total of 30 groundwater samples and 7 rainwater samples were analysed. Groundwater samples were collected in pre-cleaned bottles and stored in a refrigerator. Temperature, electrical conductivity, pH, and total dissolved solids (TDS) were measured in situ for both rain and groundwater samples.

2.2 Chloride Mass Balance (CMB) method:

The Chloride Mass Balance (CMB) technique is a widely used approach for estimating groundwater recharge, particularly in arid and semi-arid regions (Gebu & Tesfahunegn, 2019). This method relies on the principle of mass conservation, using chloride as a conservative tracer to calculate the volume of water that replenishes the groundwater system (Xu & Beekman, 2019).

The Chloride Mass Balance (CMB) method assumes that chloride originates mainly from atmospheric deposition, including precipitation and dry fallout. It is considered a conservative tracer in the unsaturated zone (Cooper et al., 2013), implying it undergoes minimal chemical or biological

alterations affecting its concentration. As water filters down through the soil to the groundwater, chloride levels rise owing to evapotranspiration, which extracts water but retains chloride.

The groundwater recharge (R) can be estimated using CMB method via the following equation (Wood & Sanford, 1995):

$$R = \frac{P \times C_P}{C_{gw}} \quad (1)$$

where, P is the annual precipitation (mm/y), C_P is the chloride concentration in precipitation (mg/L), and C_{gw} is the chloride concentration in groundwater (mg/L).

A time-averaged map of total precipitation for the years 2000 to 2019 was created using data from the Tropical Rainfall Measuring Mission (TRMM), which has a spatial resolution of $0.25^\circ \times 0.25^\circ$. This data was accessed through NASA's Giovanni, a web-based platform that offers a variety of Earth, climate, and environmental datasets (Hassan et al., 2024). Figure 2 displays the total precipitation map for the study area, which was resampled to a resolution of 30×30 m and adjusted to fit the polygon representing the study area.

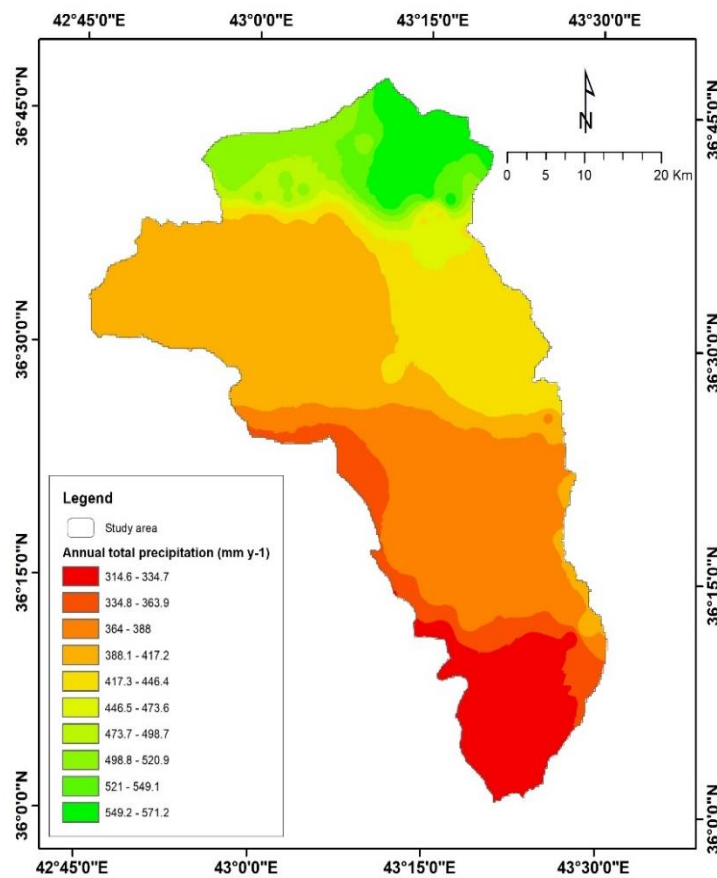


Fig. 2 Distribution of annual total precipitation (mm/y)

The ordinary kriging (OK) method was used to interpolate the field data of groundwater and rainfall chloride concentrations (Fig. 3a, b). Finally, the raster calculator in ArcGIS software was used to apply Eq. (1) and generate a map of the annual groundwater recharge in the study area (Fig. 4).

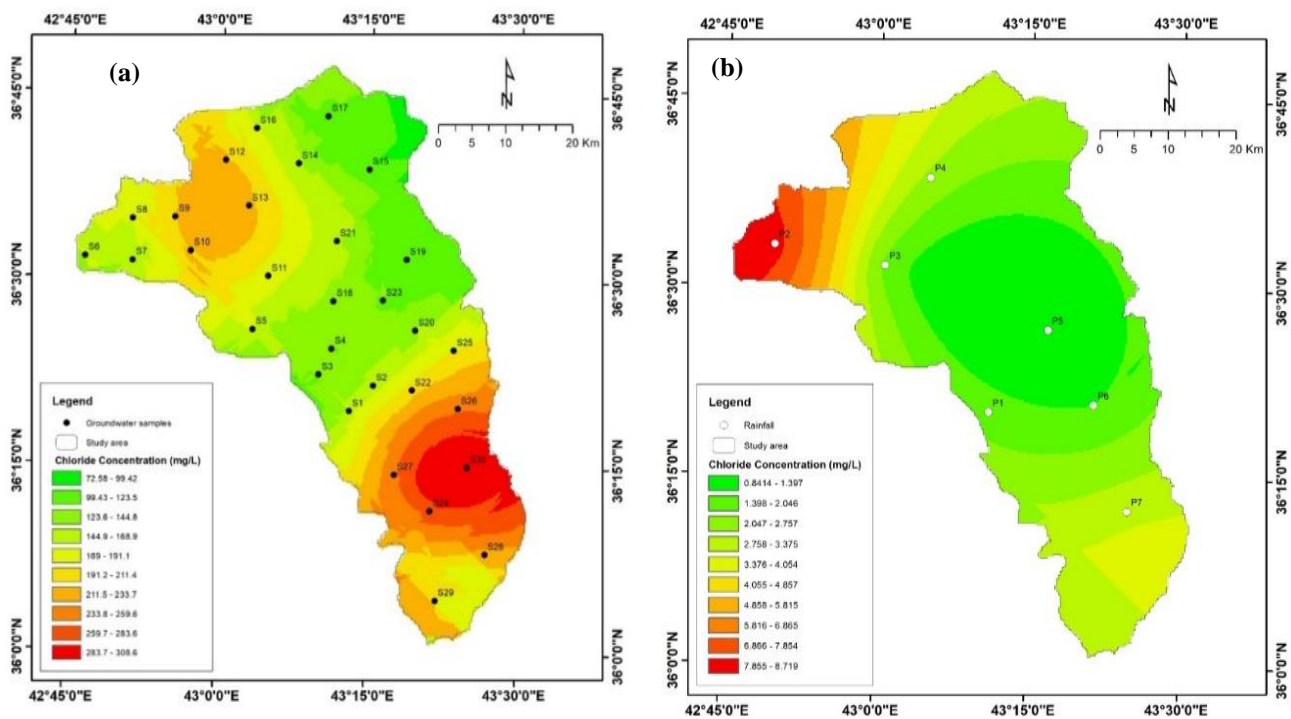


Fig. 3 Distribution of chloride concentration in (a) groundwater (mg/L) and (b) rainfall (mg/L)

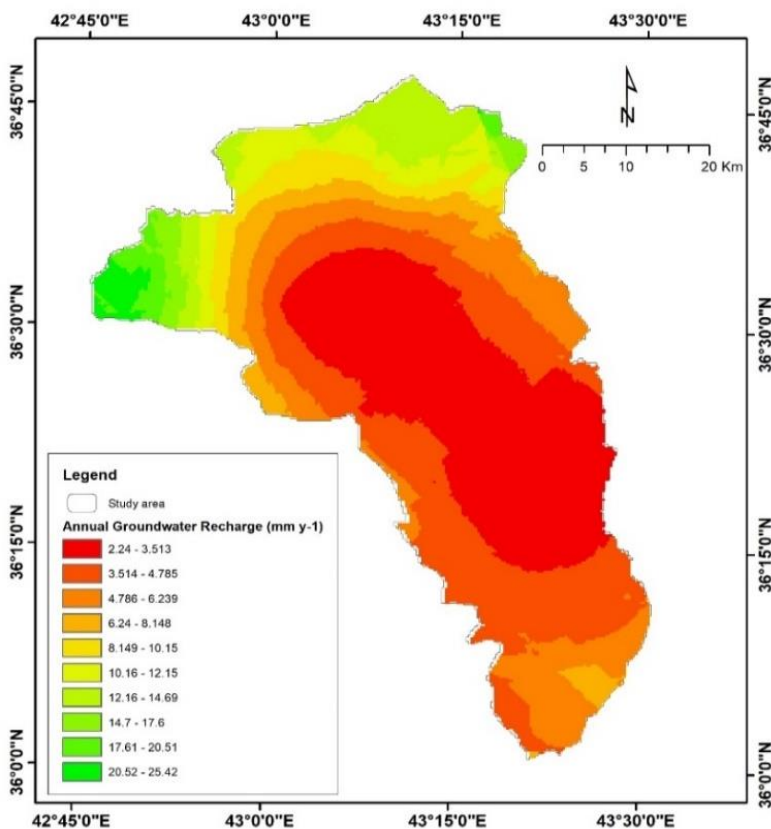


Fig. 4 Annual groundwater recharge (mm/y) estimated by CMB technique

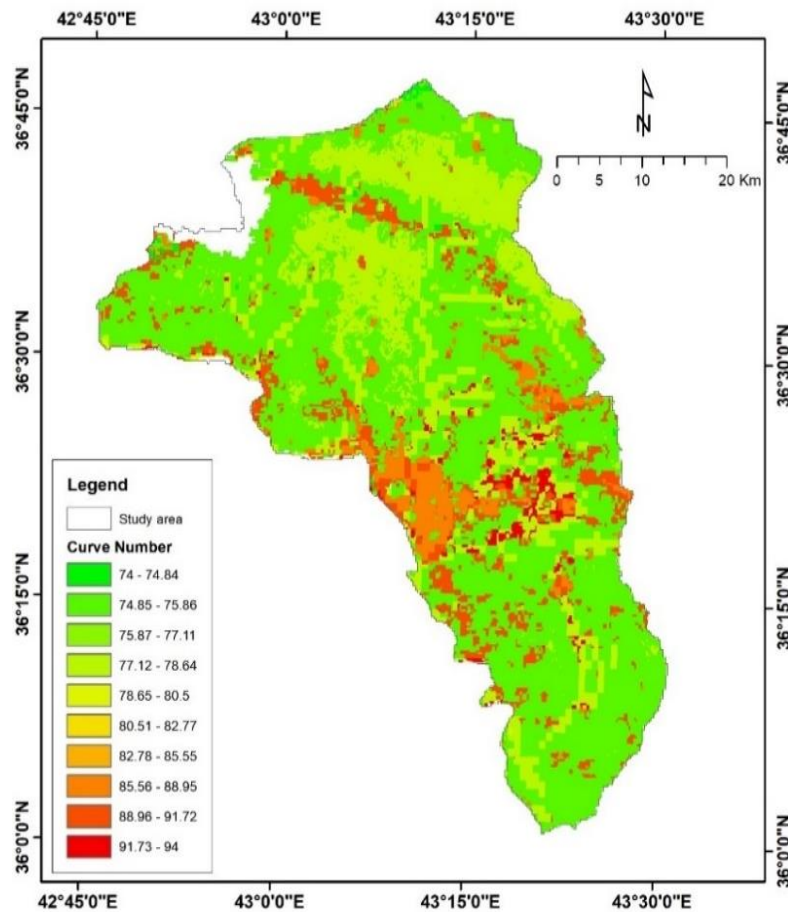


Fig. 5 Curve number of the study area (After Jaafar et al. (2019))

2.3 Validation of the groundwater recharge map:

To validate the groundwater recharge map, the global hydrological curve number (CN) map (Jaafar et al., 2019) was used. The CN, an empirical parameter in hydrology, predicts direct runoff from excess rainfall (Ahmad et al., 2015). A higher CN indicates a greater potential for runoff, implying a lower potential for groundwater recharge. The original data, gridded globally at 250×250 m resolution based on 300 m spatial resolution land cover and 250 m resolution soil data, was resampled to 30×30 m to align with other maps created for this study. Figure (5) displays the CN map for the study area.

3. Results And Discussion:

The precipitation map (Fig. 2) indicates that annual precipitation ranges from 314.58 to 571.19 mm/year, with an average of 409.68 ± 60.95 mm/year. Precipitation increases from west to east, with the lowest amounts in the southern region and the highest in the northern and northeastern regions. Chloride concentrations in groundwater samples range from 5.8 mg/L to 660.7 mg/L, with an average of 173.75 ± 160.01 mg/L. For rainfall, chloride concentrations range from 0.9 mg/L to 8.3 mg/L, with an average of 2.85 ± 2.33 mg/L. Spatially, the chloride concentration in groundwater (Fig.3a) is higher in the southern region.

and parts of the north western region near Mosul lake, while the central, northern, and northeastern regions exhibit lower chloride concentrations. The chloride concentration in rainfall (Fig. 3b) is relatively higher in the north western region compared to other areas within the study area. Groundwater recharge values derived from the CMB method (Fig. 4) range from 0.22 to 2.54 cm/year, with an average of 0.61 ± 0.43 cm/year. Recharge is highest in the northern regions, lower in the central plain, and moderate in the southern regions.

The groundwater recharge map (Fig. 4), derived using the CMB method, and was validated using the CN map (Fig. 5) by calculating the correlation coefficient (r) through the *Band Collection Statistics module* in ArcGIS 10.8 software. The calculated r between the two maps was 0.71, indicating that the CMB map successfully passed the validation test based on the assumption that CN is a good indicator of runoff generation and the absence of recharge. Overall, the CN values were extremely high, ranging from 74 to 94, with an average of 78.23 ± 5.57 , which suggests the dominance of runoff generation over groundwater recharge.

Groundwater recharge calculations utilizing the CMB method offer granular insights into localized recharge dynamics within the study area. This method, grounded in the analysis of chloride concentrations in precipitation and groundwater, provides an estimate of recharge rates principally driven by direct rainfall infiltration. The spatial variability observed in the recharge rates derived from the CMB method mirrors the heterogeneity of the study area's geographical and hydrological conditions.

The northern regions of the study area demonstrated higher recharge rates than those in the south. This trend aligns with the climatic characteristics of the area, where the northern zones generally experience greater precipitation. Additionally, the favourable topography and soil conditions in these regions further promote enhanced infiltration. Despite the localized focus of the CMB method, it effectively captured the recharge distribution across the study area. The results highlight the importance of considering rainfall and infiltration as primary contributors to groundwater recharge, especially in semi-arid regions where these processes are critical for aquifer sustainability. The validation of the CMB-derived recharge map using the Curve Number (CN) method further substantiated the results, with a correlation coefficient of 0.71, indicating a good agreement between the two methods. This validation enhances confidence in the CMB method's ability to accurately identify recharge zones and provides a reliable basis for regional groundwater management strategies.

4. Conclusions:

The main conclusions of this study are: (1) The CMB method effectively estimates groundwater recharge by directly linking rainfall infiltration to groundwater replenishment. In this study, recharge rates varied from 0.22 to 2.54 cm/year, highlighting the significant contribution of precipitation. (2) While the CMB method is primarily suited for regions where rainfall is the dominant recharge source, it may not fully account for other water inputs like surface water or irrigation return flows. (3) The CMB method revealed a clear spatial trend of increasing recharge rates from south to north, aligning with regional climatic and geographic factors. This underscores the method's ability to capture spatial variability in recharge dynamics. (4) To gain a more comprehensive understanding of groundwater recharge, integrating the CMB method with other techniques like remote sensing or hydrological modeling is recommended.

References:

- Al-Abadi, A. M., Al-Mohammdawi, J. A., Abass, A. K., Jabbar, F. K., Mohamod, M. S., & Alzahrani, H. (2024). The spatial and temporal variation of the terrestrial water storage anomaly (TWSA) of Iraq for the period 2002–2019 based on GRACE gravity data. *Kuwait Journal of Science*, 51(4), 100275.
- Al-Abadi, A. M., Hassan, A. A., Al-Moosawi, N. M., Handhal, A. M., Alzahrani, H., Jabbar, F. K., & Anderson, N. L. (2024). Drought susceptibility mapping in Iraq using GRACE/GRACE-FO, GLDAS, and machine learning algorithms. *Physics and Chemistry of the Earth, Parts A/B/C*, 103583.
- Al-Mohammdawi, J. A., Al-Abadi, A. M., Al-Ali, A. K., Shahid, S., Fryar, A., & Wang, X. (2022). Assessing the spatial and temporal variations of terrestrial water storage of Iraq using GRACE satellite data and reliability–resiliency–vulnerability indicators. *Arabian Journal of Geosciences*, 15(4), 1–13.
- Al-Ozeer, A. Z. A., Al-Abadi, A. M., Hussain, T. A., Fryar, A. E., Pradhan, B., Alamri, A., & Abdul Maulud, K. N. (2021). Modeling of Groundwater Potential Using Cloud Computing Platform: A Case Study from Nineveh Plain, Northern Iraq. *Water*, 13(23), 3330.
- Cook, P. G., & Herczeg, A. L. (2012). *Environmental tracers in subsurface hydrology*.
- Cooper, C. A., Hershey, R. L., Healey, J. M., & Lyles, B. F. (2013). *Estimation of Groundwater Recharge at Pahute Mesa using the Chloride Mass-Balance Method*. Desert Research Inst.(DRI), Reno, NV (United States).
- Foster, S. S. D., & Chilton, P. J. (2003). Groundwater: The processes and global significance of aquifer degradation. *Philosophical Transactions of the Royal Society of London. Series B: Biological Sciences*, 358(1440), 1957–1972.
- Gebru, T. A., & Tesfahunegn, G. B. (2019). Chloride mass balance for estimation of groundwater recharge in a semi-arid catchment of northern Ethiopia. *Hydrogeology Journal*, 27(1).
- Hanna, R., & Kruczek, G. J. (2020). Contested control: The future of security in Iraq’s Nineveh Plain. *Assyrian Policy Institute*, June.
- Healy, R. W. (2010). *Estimating groundwater recharge*. Cambridge university press.
- Hengl, T., Mendes de Jesus, J., Heuvelink, G. B. M., Ruiperez Gonzalez, M., Kilibarda, M., Blagotić, A., Shanguan, W., Wright, M. N., Geng, X., & Bauer-Marschallinger, B. (2017). SoilGrids250m: Global gridded soil information based on machine learning. *PLoS One*, 12(2), e0169748.
- Konikow, L. F., & Kendy, E. (2005). Groundwater depletion: A global problem. *Hydrogeology Journal*, 13(1), 317–320.
- Kummerow, C., Barnes, W., Kozu, T., Shiue, J., & Simpson, J. (1998). The tropical rainfall measuring mission (TRMM) sensor package. *Journal of Atmospheric and Oceanic Technology*, 15(3), 809–817.
- Liaqat, M. U., Mohamed, M. M., Chowdhury, R., Elmahdy, S. I., Khan, Q., & Ansari, R. (2021). Impact of land use/land cover changes on groundwater resources in Al Ain region of the United Arab Emirates using remote sensing and GIS techniques. *Groundwater for Sustainable Development*, 14, 100587.

- MacGinnis, J., & Matney, T. (2009). Archaeology at the frontiers: Excavating a provincial capital of the Assyrian empire. *Journal of Assyrian Academic Studies*, 23(1), 3–21.
- Mehner, T. (2009). *Encyclopedia of inland waters*. Academic Press.
- Ross, C. W., Prihodko, L., Anchang, J., Kumar, S., Ji, W., & Hanan, N. P. (2018). *Global hydrologic soil groups (HYSOGs250m) for curve number-based runoff modeling*. ORNL DAAC, Oak Ridge, Tennessee, USA.
- Scanlon, B. R., Jolly, I., Sophocleous, M., & Zhang, L. (2007). Global impacts of conversions from natural to agricultural ecosystems on water resources: Quantity versus quality. *Water Resources Research*, 43(3).
- Sokolov, A. A., & Chapman, T. G. (1974). *Methods for water balance computations: An international guide for research and practice*.
- Theon, J. S. (1994). The tropical rainfall measuring mission (TRMM). *Advances in Space Research*, 14(3), 159–165.
- Voss, K. A., Famiglietti, J. S., Lo, M., De Linage, C., Rodell, M., & Swenson, S. C. (2013). Groundwater depletion in the Middle East from GRACE with implications for transboundary water management in the Tigris-Euphrates-Western Iran region. *Water Resources Research*, 49(2), 904–914.
- Wood, W. W., & Sanford, W. E. (1995). Chemical and isotopic methods for quantifying groundwater recharge in a regional, semiarid environment. *Groundwater*, 33(3), 458–468.
- Xu, Y., & Beekman, H. E. (2019). Groundwater recharge estimation in arid and semi-arid southern Africa. *Hydrogeology Journal*, 27(3), 929–943.

Conflicts of Interest Statement.....

Manuscript title: The Study of Annual Groundwater Recharge of Nineveh plain, Northern Iraq Using Gravity Satellite Data and GIS-Based Deep Learning

The authors whose names are listed immediately below certify that they have NO affiliations with or involvement in any organization or entity with any financial interest (such as honoraria; educational grants; participation in speakers' bureaus; membership, employment, consultancies, stock ownership, or other equity interest; and expert testimony or patent-licensing arrangements), or non-financial interest (such as personal or professional relationships, affiliations, knowledge or beliefs) in the subject matter or materials discussed in this manuscript.

Author names:

Fatima Abdul Jabbar Abdul Wahab
Department Of Geology
College Of Science
University Of Basra

The authors whose names are listed immediately below report the following details of affiliation or involvement in an organization or entity with a financial or non-financial interest in the subject matter or materials discussed in this manuscript. Please specify the nature of the conflict on a separate sheet of paper if the space below is inadequate.

Author names:

Prof. Dr. Alaa Mohsen Attia
Department Of Geology
College Of Science
University Of Basra

This statement is signed by all the authors to indicate agreement that the above information is true and correct (a photocopy of this form may be used if there are more than 10 authors):

Author's name (typed)

Fatima Abdul Jabbar Abdul Wahab



Date

2025/2/25